

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 977 421 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.02.2000 Bulletin 2000/05

(51) Int Cl.7: **H04N 1/10**(21) Application number: **99305519.3****BEST AVAILABLE COPY**(22) Date of filing: **12.07.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **31.07.1998 US 127454**

(71) Applicant: **Hewlett-Packard Company**
Palo Alto, California 94304 (US)


(72) Inventors:
• **Batten, Patrick A.**
Fort Collins, CO 80521 (US)
• **Christensen, Michael L.**
Windsor, CO 80650 (US)
• **Chavez, Martha A.**
Greeley, CO 80634 (US)

(74) Representative: **Jehan, Robert et al**
Williams, Powell & Associates,
4 St Paul's Churchyard
London EC4M 8AY (GB)

(54) **Adapter for scanning transparencies with a reflective document scanner**

(57) An adapter (104) for scanning transparent images (202) using a reflective scanner (100) receives light from a lamp (200) inside the scanner and redirects the light through the transparent image and back into the scanner. The scanner has an offset between an illumination line (304) and a scan line (300, 402). An angle of the adapter relative to the surface of a platen on the scanner is dependent on the distance between the

illumination line and the scan line. At least one angle adjuster (106, 806, 808) is provided on the adapter to enable the adapter to be used on scanners having different offsets. In addition, the adapter is made wider than the transparent image to be scanned, so that when the scan line is at a leading or trailing edge of the transparent image, the adapter still captures light from the lamp within the scanner.

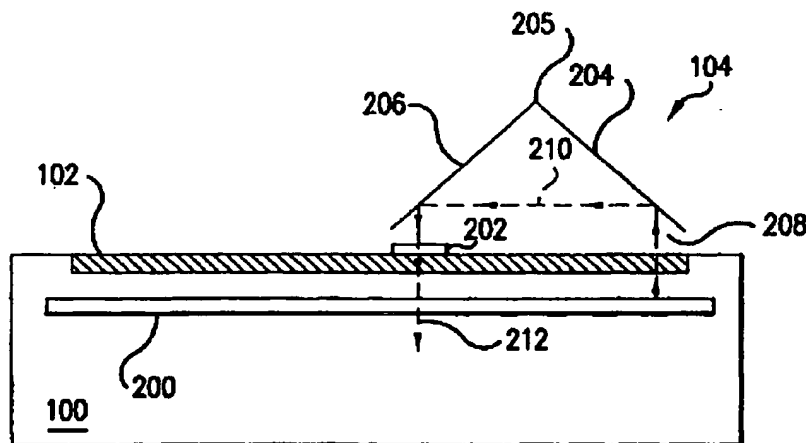**FIG.2**

Printed by Jouve, 75001 PARIS (FR)

EP 0 977 421 A2

1

EP 0 977 421 A2

2

Description

[0001] This invention relates generally to optical scanners and more specifically to an adapter for scanning transparent images such as slides and negatives.

[0002] Document scanners convert a visible image on a document or photograph, or a image in a transparent medium, into an electronic form suitable for copying, storing or processing by a computer. A document scanner may be a separate device or a document scanner may be a part of a copier, part of a facsimile machine, or part of a multipurpose device. Reflective document scanners typically have a controlled source of light which is reflected off the surface of a document, through an optics system, and onto an array of photosensitive devices. The photosensitive devices convert received light intensity into an electronic signal. Transparency scanners pass light through a transparent image, for example a photographic positive slide, through an optics system, and then onto an array of photosensitive devices.

[0003] Reflective document scanners may be adapted to scan transparent images by providing a separate light source to back-light the image. U.S. Patent Number 5,463,217 (Sobol *et al.*),

describes a completely passive adapter for scanning transparent images in a reflective scanner without requiring a separate light source for back lighting. A light source in the reflective scanner provides light which passes outside the area of the transparent image. The adapter captures light which passes outside the area of the transparent image and reflects the light through the transparent image. The reflected light reenters the scanner along the optical path required by scanner internal optics. The various embodiments described in Sobol *et al.* are suitable for a fixed scanner optical path. However, when a new scanner is developed, the angle of the adapter mirrors may need to change to accommodate a different optical path within the new scanner.

[0004] The present invention seeks to provide an adapter for scanning a transparent image.

[0005] According to an aspect of the present invention, there is provided an adapter as specified in claim 1.

[0006] The preferred embodiment can provide an adjustable adapter that can be adjusted to different optical paths in different scanners, thereby permitting a single adapter to be used with multiple scanner designs.

[0007] For some scanners, the lamp leads the scan line during scanning movement, and for other scanners, the lamp lags the scan line during scanning movement. The preferred embodiment can ensure that for either case, when the scan line is within the image to be captured, then the lamp is within the light capture area for the adapter.

[0008] One scanner/adapter variable of concern is the distance, measured on the top surface of the platen, from the scan line to the effective illumination line. When this distance changes, the angle of the slide adapter rel-

ative to the platen must also change. In a first embodiment, the angle of the overall adapter relative to the platen can be adjusted, thereby providing compensation for scan line to illumination line distance. The second variable of concern is whether the scanner lamp leads or lags the scan line. Preferably, the light capture area extends beyond the image area, thereby enabling the adapter to accommodate designs in which the lamp leads the scan line or designs in which the lamp lags the scan line. Providing adjustable angle and larger light capture area enables the adapter to be used with multiple scanner designs.

[0009] An embodiment of the present invention is described below, by way of example only, with reference to the accompanying drawings, in which:

[0010] Figure 1 is a perspective top rear view of a scanner with an embodiment of adapter for scanning transparencies.

[0011] Figure 2 is a simplified cross section end view of the scanner and adapter of figure 1.

[0012] Figure 3 is a simplified cross section side view of an embodiment of a scanner as in figure 1 and the adapter of figure 1.

[0013] Figure 4A is a simplified top view of the scanner embodiment of figure 3 and the adapter of figure 1.

[0014] Figure 4B is a simplified top view of an alternative embodiment of a scanner as in figure 1 and the adapter of figure 1.

[0015] Figure 5A is a rear plane view of the adapter of figure 1 with the angle adjuster removed.

[0016] Figure 5B is a cross section view through the rear wall of the adapter of figure 5A.

[0017] Figure 6A is a front view of one embodiment of the angle adjuster of figure 1.

[0018] Figure 6B is a cross section view through the angle adjuster of figure 6A.

[0019] Figure 7A is a front view of a second embodiment of the angle adjuster of figure 1.

[0020] Figure 7B is a cross section view through the angle adjuster of figure 7B.

[0021] Figure 8 is a top view of an alternative embodiment of adapter.

[0022] Figure 1 is a perspective view of a scanner 100. The scanner 100 has a transparent platen 102, on which opaque documents or photographs may be placed face down for scanning. An adapter 104 is placed onto or near the surface of the platen. An image transparency, for example a 35 mm positive slide or a strip of film with negative images, is placed on the platen under the adapter 104, as will be discussed below and illustrated in other figures. Of particular interest to the present description is an angle adjuster 106, and an offset 108 such that part of the adapter 104 may be substantially wider than the transparent image to be scanned.

[0023] Figure 2 is a simplified cross-section end view of the document scanner 100 and transparency adapter 104 of figure 1. In figure 2, the document scanner 100

2

3

EP 0 977 421 A2

4

includes an internal lamp 200. Also illustrated is a image transparency 202. The transparency adapter 104 comprises two reflective surfaces (204, 206) that receive light from the lamp 200 within the scanner and re-direct the light through the transparency 202 and back into the scanner at a particular required angle. Dashed lines 208, 210, and 212 depict segments of a ray of light starting within the scanner from the lamp 200, reflecting off surface 204, then off surface 206, passing through the transparency 202 and then reentering the scanner 100.

[0024] Figure 3 is a simplified cross-section side view of the document scanner and transparency adapter of figure 1. A scan line 300 on the top surface of the platen 102 is defined by optics (not illustrated) within the scanner. In figure 3, the required optical path with the scanner is depicted as being controlled by a field stop 302 (not illustrated in figures 1 and 2) which requires light to enter the scanner optics at a particular angle and position. A field stop may or may not be physically present, but in general, every scanner has some effective scan line on the image to be scanned and some effective angle for the light from the scan line entering the scanner optics. In the case of a reflective scanner with an opaque document positioned face down on the top surface of the platen, the scan line is defined on the top surface of the platen. A scanner may also include internal mirrors (not illustrated) for folding an optical path and a lens system (not illustrated). Tracing backwards along light rays 212, 210, and 208, reflective surface 204 effectively receives light along an illumination line 304, which is also defined on the top surface of the platen. Note that for reflective images, the scan line and the illumination line may be identical. That is, due to specular reflection, some light at the scan line is directly reflected at the proper angle to be received by the scanner optics. However, for the transparency adapter, an effective illumination line 304 is offset from the scan line. The intersection (205) of the reflective planes (figure 2, 204, 206) is at an angle γ relative to the plane of the platen 102. The magnitude of the angle γ is determined by the offset between the scan line 300 and the effective illumination line 304. In figure 3, the angle γ , and the offset between the scan line and the illumination line, are exaggerated to facilitate illustration. As will be discussed further below, angle γ is adjustable by use of angle adjuster 106.

[0025] Figure 4A is a simplified top view of the document scanner of figure 3 and the transparency adapter of figure 1. Note in figure 4A that as a result of the angle γ (figure 3), light ray segment 210 has a directional component parallel to the centerline 400 of the scanner. The directional component of segment 210 parallel to the centerline 400 provides an illumination offset required by the effective offset between the lamp 200 and the scan line 300.

[0026] Note also in figures 2 and 4A that the image transparency 202 is placed near the centerline 400 of the platen 104. As discussed in Sobol *et al.* (figure 9), light rays from the scan line may also be required to con-

verge toward the center line of the scanner to a small sensor array. As discussed in Sobol *et al.*, if the image transparency extends too far toward the ends of the lamp, and if the scanner optics have a short focal length, a lens may be required within the adapter. Placing the image transparency near the centerline of the platen, instead of near a side edge of the platen, eliminates the need for a lens in the adapter for many scanners.

[0027] In figures 3 and 4A, note that the lamp 200 and scan line 300 move past the image transparency 202 along direction 306 (figure 3), scanning one line at a time. In figure 3, for lamp and scan line movement in direction 306, the scan line leads the lamp. In some scanners, the scan line may trail the lamp. In figure 4B, the scan line 402 trails the lamp 200. If the spacing between the illumination line for lamp 200 and scan line 402 (figure 4B) is the same as the spacing between the illumination line for lamp 200 and scan line 300 (figure 4A), the angle γ (figure 3) remains the same, and the adapter 104 is simply rotated 180 degrees and placed onto the opposite side of the platen (figure 4B) to provide an offset in light segment 404 (figure 4B) parallel to the centerline 400.

[0028] In figures 3 and 4A, if the adapter 104 is made approximately the same width as the image transparency 202, when the scan line first reaches the leading edge of the image the lamp may still be outside the adapter. In figure 4B, if the adapter 104 is made approximately the same width as the image transparency 202, when the scan line is at the trailing edge of the image (as defined by scanning direction 306 in figure 3), the lamp 200 may have passed beyond the adapter. In the example embodiment of the adapter illustrated in figures 1, 2, 3, 4A and 4B, the reflecting surface that first receives light from the lamp (reflecting surface 204) is made wider than the reflecting surface that directs light through the image transparency (reflecting surface 206). The location of the image transparency is then offset so that in the case of the scan line leading the lamp (figures 3 and 4A), the image is placed so that when the scan line first reaches the leading edge of the image the lamp is under the adapter. For the case of the scan line trailing the lamp (figure 4B), the adapter is simply rotated 180 degrees and placed onto the opposite side of the platen, resulting in an image placement so that when the scan line reaches the trailing edge of the image, the lamp is still under the scanner. Alternatively, the entire adapter may be made as wide as the reflecting surface 204, with suitable locating features for the image transparency.

[0029] The specific details regarding how angle adjustment is accomplished are not important and the following examples are just to illustrate two possible example embodiments. Figure 5A shows the rear (when positioned as in figures 1, 3 and 4A) face of the adapter 104 with the angle adjuster 106 removed. In the example embodiments for adjustable angle, the rear wall of the adapter includes a notch 500 with a ratchet pattern 502 formed on the rear face, on both sides of the notch.

3

5

EP 0 977 421 A2

6

Figure 5B provides additional detail for the ratchet pattern 502.

[0030] Figure 6B shows the face of the angle adjuster 106 that presses against the surface of the adapter shown in figure 5A. In the example embodiment illustrated in figures 6A and 6B, the angle adjuster 106 has a flange 600 on a post 602 so that the post 602 may be inserted into the slot 500 (figure 5A), and the flange 600 holds the angle adjuster securely against the adapter. Ratchet patterns 604 on the angle adjuster 106 mate with the ratchet patterns 502 on the adapter (figure 5A) so that the adjuster 106 may be easily moved upward (post 602 may easily move further into the slot 500) but the ratchet patterns will not allow the adapter to slip down unless the ratchet patterns are forced apart.

[0031] In the example embodiment illustrated in figures 7A and 7B, the angle adjuster has a post 702 without a flange, and the adjuster has fingers 700 that slip behind the rear wall of the adapter for holding the angle adjuster to the adapter. Ratchet patterns 704 mate with ratchet patterns 502 on the adapter, thereby permitting easy attachment of the adjuster to the adapter but requiring the ratchet patterns to be forced apart to enable removal of the adjuster.

[0032] In figures 4A and 4B, the adapter is rotated 180 degrees and placed onto the opposite side of the platen. For ease of use, it may be preferable to always locate one particular corner of the adapter at one particular corner of the platen. If a standard reference corner is desirable, then the adapter may be made slightly larger and symmetrical. An example is illustrated in figure 8. In figure 8, an adapter 800 has a first reflective surface 802 receiving light, and a second reflective surface 804 that directs light through a transparent image 202. Reflective surface 802 extends beyond reflective surface 804 in both leading and trailing scanning directions to accommodate a lamp leading the scan line or a lamp trailing the scan line. In addition, the adapter 800 has two angle adjusters 806 and 808 so that either the leading edge or the trailing edge can be lifted. The resulting adapter can accommodate a lamp leading the scan line, a lamp trailing the scan line, adjustable angle γ (figure 3), and is always placed with one particular adapter corner positioned at one particular platen corner.

[0033] As discussed above, adapters 104 and 800 exhibit three important improvements, namely:

1. The angle γ is adjustable by use of angle adjuster (106, 806, 808).
2. The light receiving reflecting surface (204, 802), is made wider than the image transparency to accommodate varying positions of the lamp relative to the scan line.
3. The position of the image transparency within the adapter is offset from one or both edges of the light receiving reflecting surface, along the dimension parallel to the centerline of the scanner.

[0034] As a result of the above three improvements which can be provided together or separately in different embodiments, adapter 104 can be used with a variety of different scanners, with different illumination line to scan line spacings, and different spatial ordering of the lamp relative to the scan line.

[0035] The disclosures in United States patent application no. 09/127,454, from which this application claims priority, and in the abstract accompanying this application, are incorporated herein by reference.

Claims

1. An adapter (104) for scanning a transparent image (202) using a reflective scanner (100) which has a platen (102) for receiving a reflective document, the adapter comprising:

at least two planar surfaces (204, 206) which are at least partially reflective so that when the adapter is placed onto a platen, light from inside the reflective scanner passes outside the transparent image and is reflected off the planar surfaces and through the transparent image back into the reflective scanner; the surfaces intersecting at a line of intersection (205), such that when the adapter is placed onto a platen, the line of intersection has an angle relative to the platen; and

at least one angle adjuster (106, 806, 808) movable relative to the planar surfaces so that when the adapter is placed onto a platen, movement of the angle adjuster relative to the planar surfaces changes the angle of the line of intersection relative to the platen.

2. An adapter as in claim 1, wherein:

the planar surfaces comprise a first surface (204) operable directly to receive light from a scanner along an illumination line (304), such that when a scan line of the scanner is on the transparent image and the illumination line is outside the transparent image, the first surface receives light along the illumination line from the scanner.

3. An adapter as in claim 2, wherein:

the first surface has a dimension in the scanning direction which is substantially greater than a dimension of a transparent image in the scanning direction.

EP 0 977 421 A2

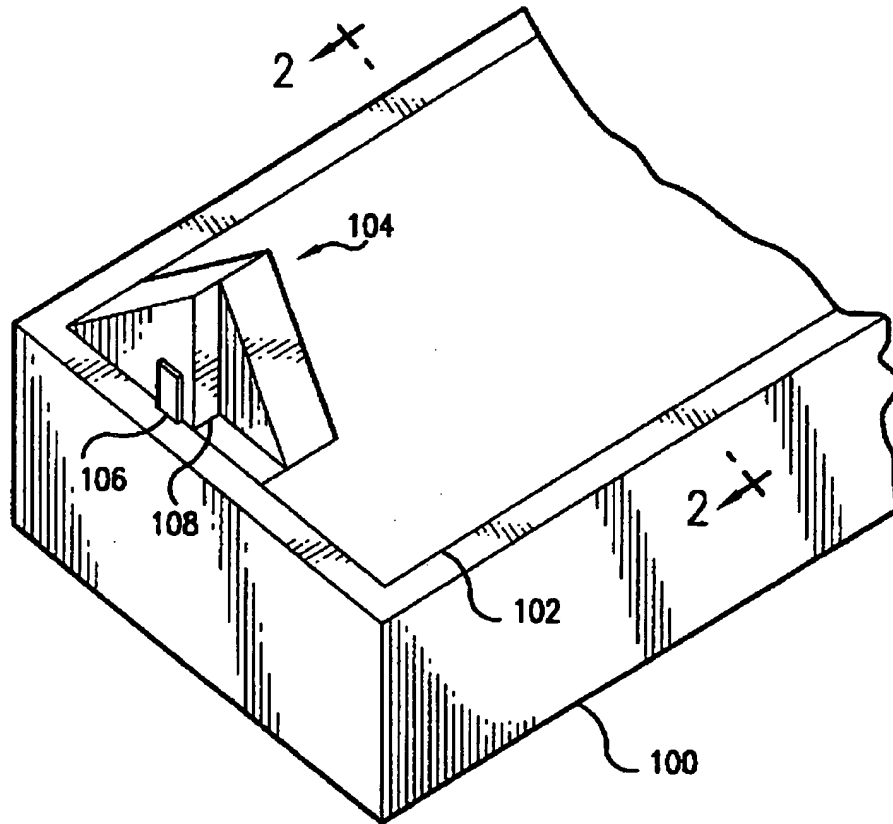


FIG. 1

EP 0 977 421 A2

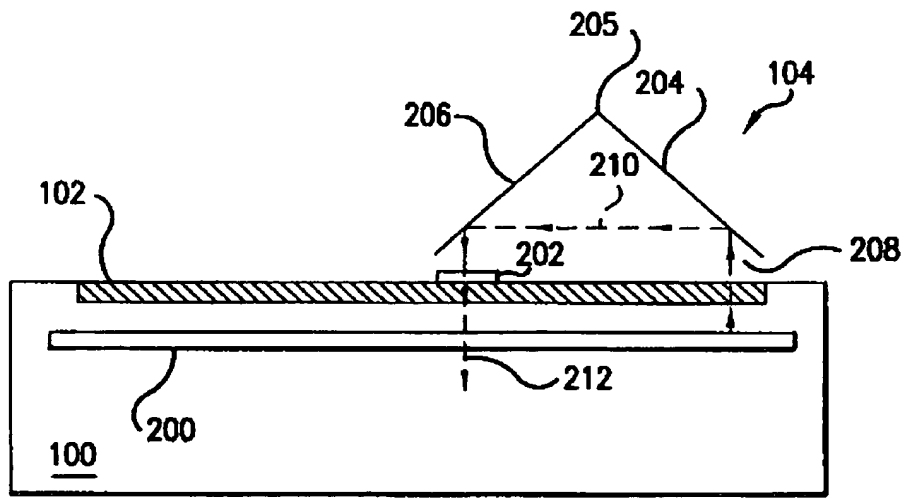


FIG.2

EP 0 977 421 A2

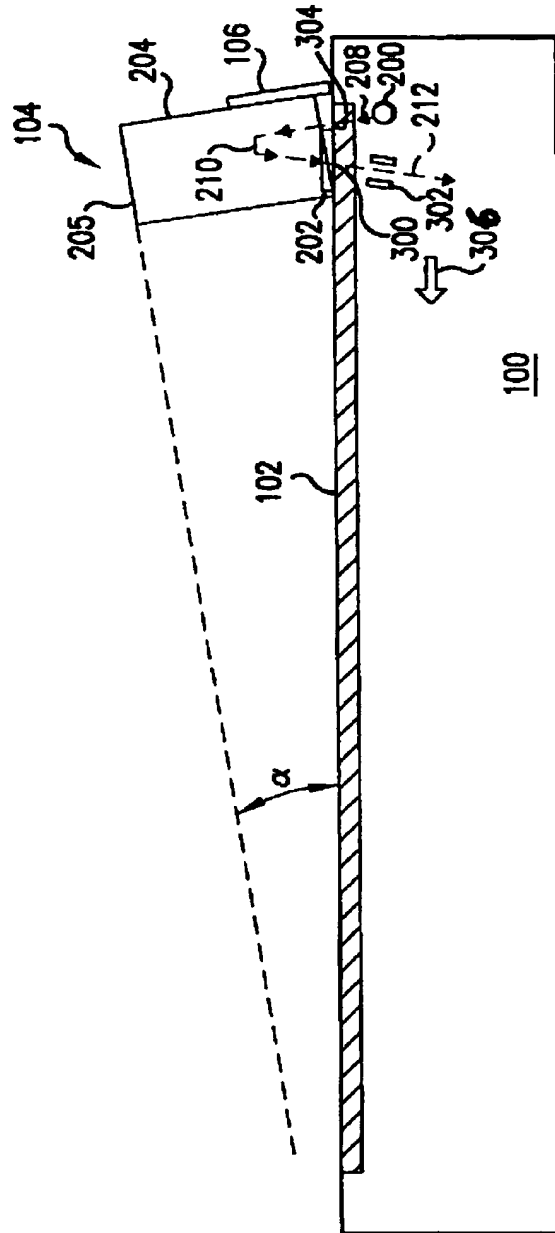


FIG.3

EP 0 977 421 A2

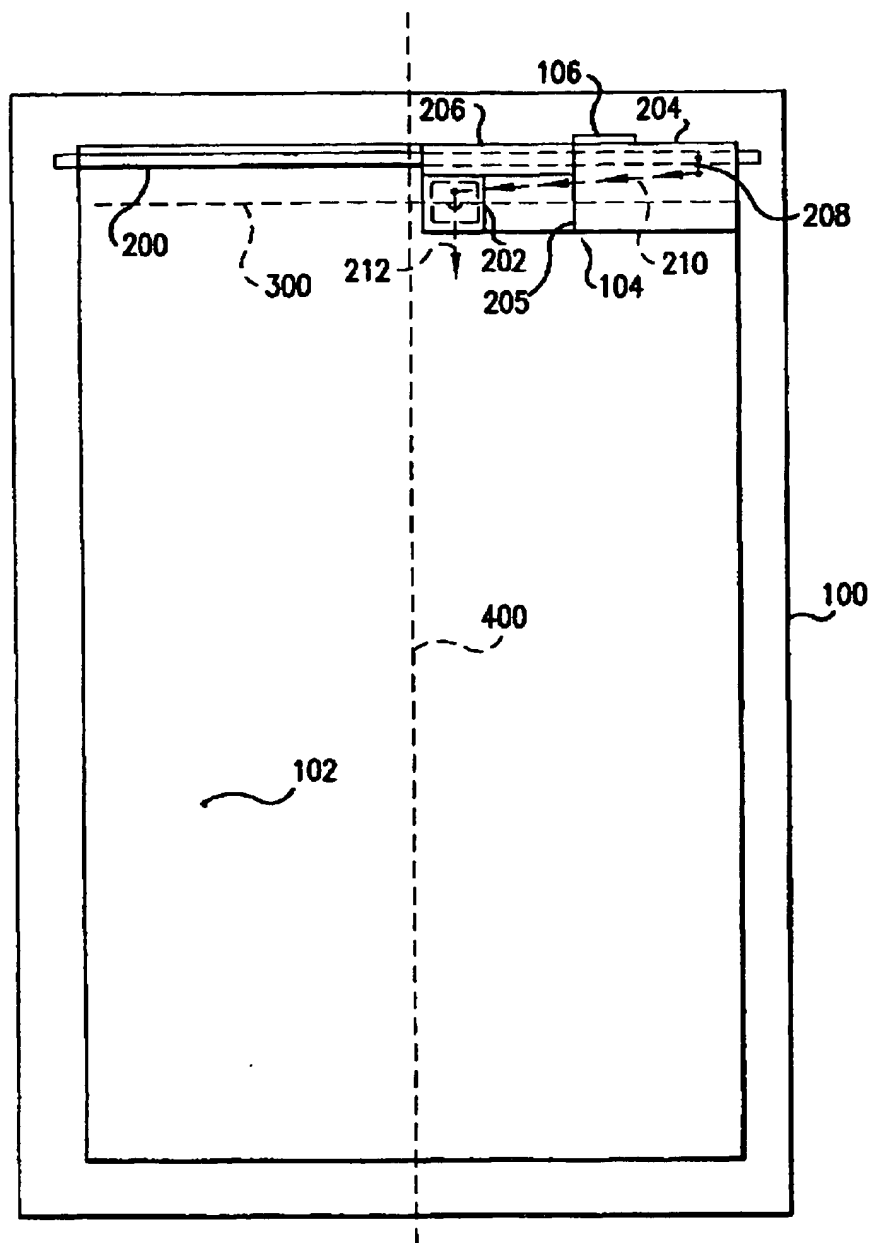


FIG. 4A

EP 0 977 421 A2

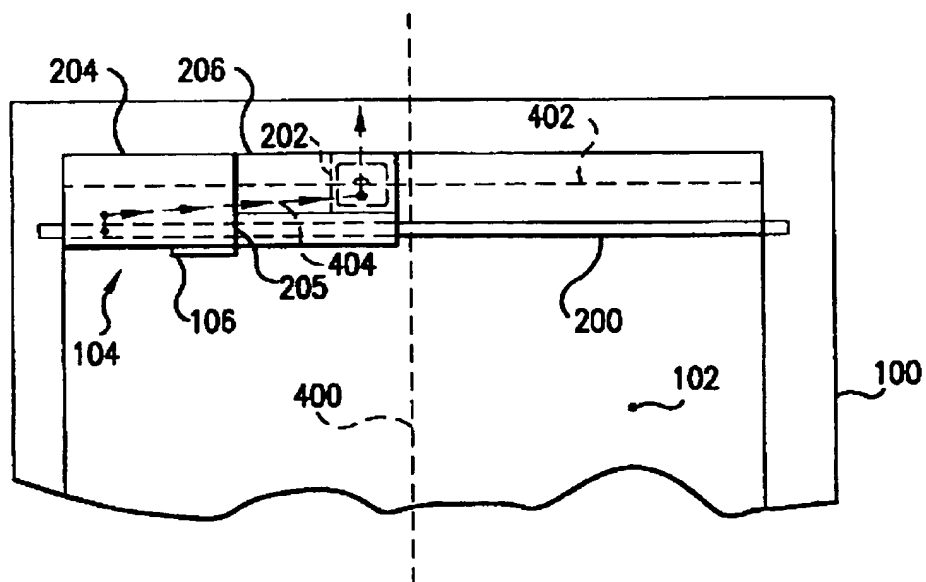


FIG.4B

EP 0 977 421 A2

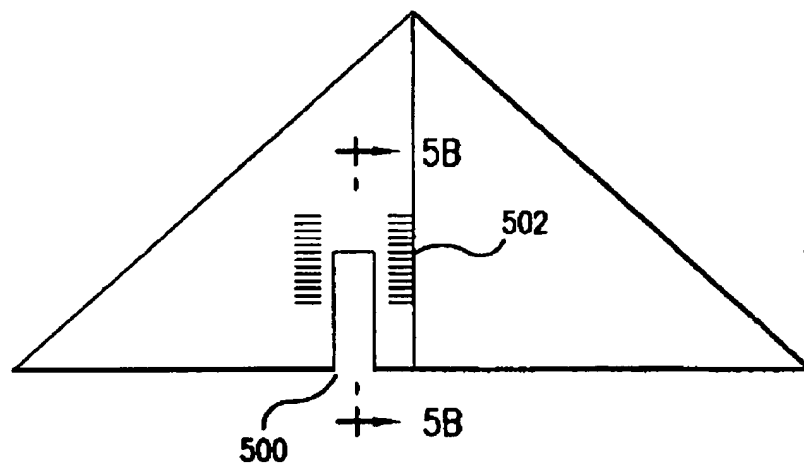


FIG. 5A

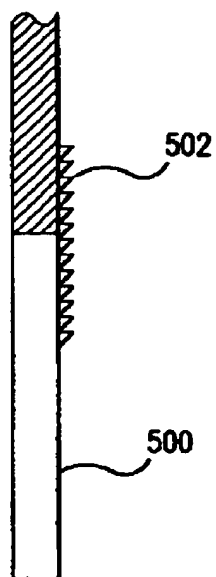


FIG. 5B

EP 0 977 421 A2

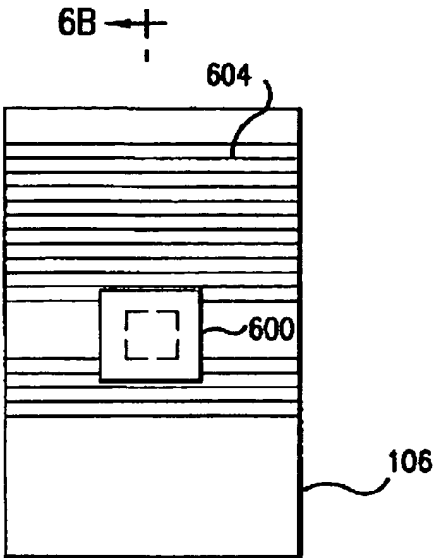


FIG. 6A

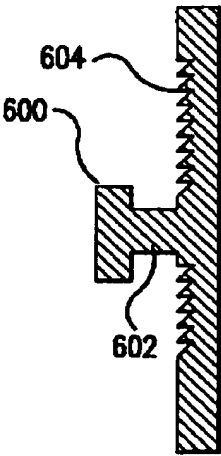


FIG. 6B

EP 0 977 421 A2

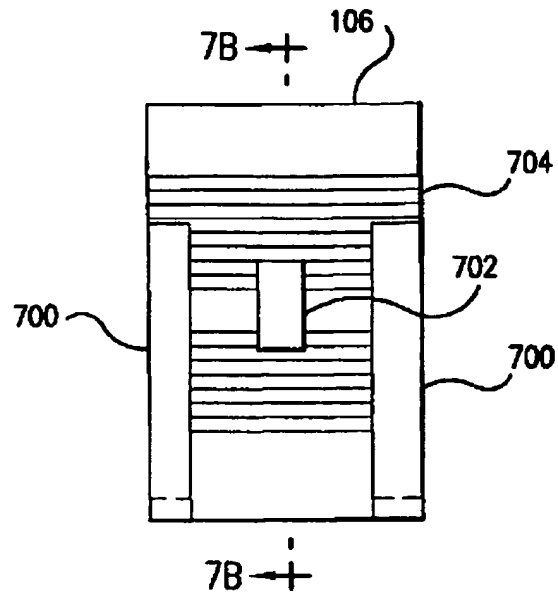


FIG. 7A

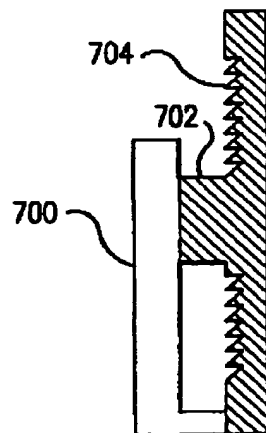


FIG. 7B

EP 0 977 421 A2

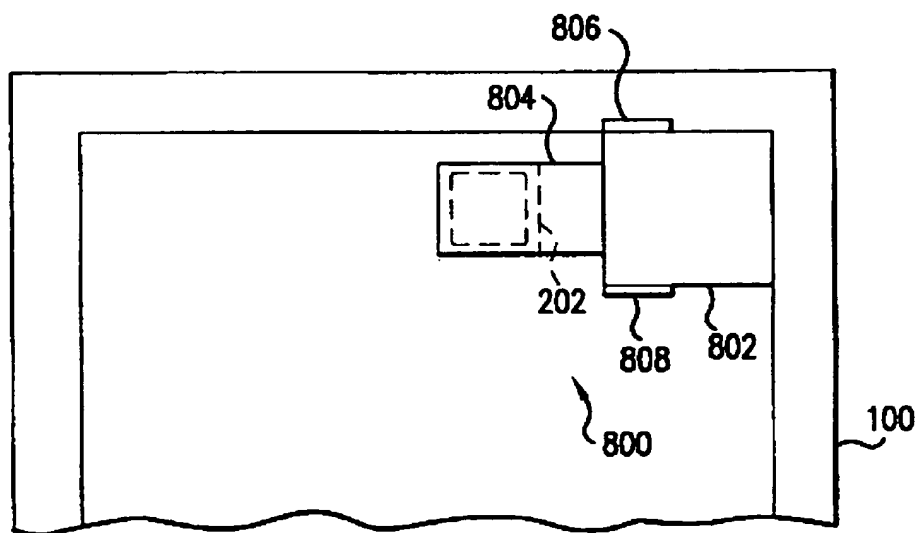


FIG. 8

(19)  **Europäisches Patentamt**
European Patent Office
Office européen des brevets



(11) **EP 0 977 421 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
17.01.2001 Bulletin 2001/03

(51) Int Cl.7: **H04N 1/10**

(43) Date of publication A2:
02.02.2000 Bulletin 2000/05

(21) Application number: **99305519.3**

(22) Date of filing: **12.07.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
 • **Batten, Patrick A.**
Fort Collins, CO 80521 (US)
 • **Christensen, Michael L.**
Windsor, CO 80550 (US)
 • **Chavez, Martha A.**
Greeley, CO 80634 (US)

(30) Priority: **31.07.1998 US 127454**

(71) Applicant: **Hewlett-Packard Company**
Palo Alto, California 94304-1112 (US)

(74) Representative: **Jehan, Robert et al**
Williams, Powell & Associates,
4 St Paul's Churchyard
London EC4M 8AY (GB)

(54) **Adapter for scanning transparencies with a reflective document scanner**

(57) An adapter (104) for scanning transparent images (202) using a reflective scanner (100) receives light from a lamp (200) inside the scanner and redirects the light through the transparent image and back into the scanner. The scanner has an offset between an illumination line (304) and a scan line (300, 402). An angle of the adapter relative to the surface of a platen on the scanner is dependent on the distance between the

illumination line and the scan line. At least one angle adjuster (106, 806, 808) is provided on the adapter to enable the adapter to be used on scanners having different offsets. In addition, the adapter is made wider than the transparent image to be scanned, so that when the scan line is at a leading or trailing edge of the transparent image, the adapter still captures light from the lamp within the scanner.

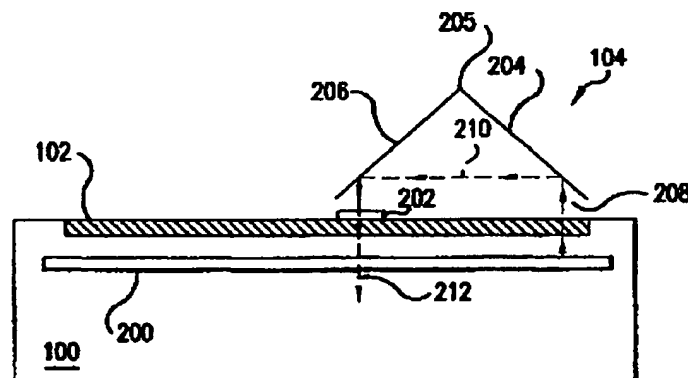


FIG.2

Printed by Jouve, 75001 PARIS (FR)

EP 0 977 421 A3

EP 0 877 421 A3

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 5519

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
D,X	US 5 463 217 A (WEBB STEVEN L ET AL) 31 October 1995 (1995-10-31) * column 8, line 67 - column 9, line 36 *	1-3	H04N1/10
E	WO 99 37086 A (FERNANDEZ BRACERAS JUSTO LUIS ; PROMONOR SEXTA INVERSIONES S L (ES)) 22 July 1999 (1999-07-22) * page 3, line 10 - line 14; figure 2 *	1-3	
			TECHNICAL FIELDS SEARCHED (InCL7)
			H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 November 2000	Examiner Hazel, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 (04/99) (EN)

EP 0 977 421 A3

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 99 38 5519

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-11-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5463217	A	31-10-1995	JP 7085206	A	31-03-1995
WO 9937086	A	22-07-1999	ES 2141035	A	01-03-2000

EPO FORM P0419

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82